

- Do not place or keep the device near any heat source, such as, direct sun light, radiators, stoves or other apparatus which produces heat. It may cause explosion, degrade the performance or reduce battery life.
- Do not modify, repair or disassemble device at discretion (especially battery, it may cause an explosion). Doing this will avoid the warranty.
- Do not place heavy objects on the device.
- Use the supplied and approved charger only.
- Service must be done by qualified service center or manufacturer.
- Unplug this device when unused for long periods of time or during lightening storms.

Technical Specifications

Blue tooth version	CSR 3.0
Blue tooth profile	A2DP and AVRCP
Working range	10 m
TX mode working time	9 hours

-7-

RX mode working time	8 hours
Standby time	up to 200 hours
Charging time	about 3 hours
Charging input voltage	DC 5V
Battery	260mAh rechargeable Li-polymer battery
Dimensions	1.5 x 1.53 x 0.6 in (38 x 39 x 15 mm)
Net Weight	0.04 lb (19g)

The working and standby times may vary when used with different mobile phones or other compatible Blue tooth devices, usage setting, usage styles and environments. Specifications are subject to be changed and improved without notice.

-8-

Warranty

MOCREO products are protected with 18 months manufacturer warranty. Photos of the product may not reflect the actual content. MOCREO MAKES NO OTHER EXPRESS WARRANTIES.



MANUFACTURER
OAZON INC. (US)
<http://mocreo.com>

-9-


MOCREO®

MOCREO ClipXR

2-in-1 Blue tooth Receiver and Transmitter


User's Guide

Package

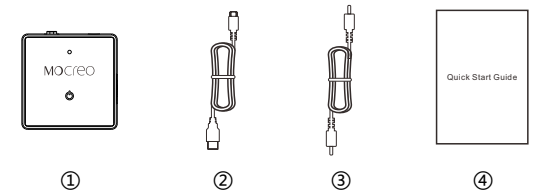

No.	Name	Quantity
1	MOCREO ClipXR Blue tooth Transceiver	1
2	Micro USB Cable	1
3	3.5mm Audio Cable	1
4	Quick Start Guide	1

Overview

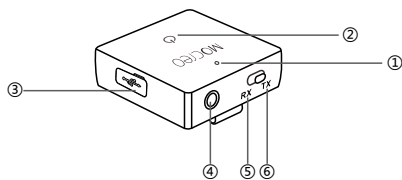

1. LED indicator
2. Multi-functional button (MFB)
3. Micro USB charging jack
4. 3.5mm audio port
5. Secure clip
6. RX / TX switch button

Introduction

ClipXR is a 2-in-1 Blue tooth stereo audio adapter, which can be easily switched between receiving and transmitting modes. It is very simple to access to your audio devices sending or receiving stereo audio via Blue tooth wirelessly. No extra software installation is needed.

-1-

Note:

1. Please make sure your smartphone is Blue tooth-enabled before pairing.
2. The pairing mode will last for 2 minutes.
3. Once turned on, the receiver ClipXR will search and connect automatically with the last paired device which is in working range.
4. The receiver ClipXR will automatically switch off if no device can be connected within 5 minutes.
5. Clear the pairing list: Turn the Blue tooth receiver ClipXR off, then press and hold the MFB button for about 12 seconds until the LED flashes in red for 1 second and then flashes in blue for 1 second. Afterwards, the receiver enters into pairing mode automatically.

Stream music

1. After pairing, connect the Blue tooth receiver ClipXR to a 3.5mm stereo headset or wired speaker via the supplied 3.5mm to 3.5mm audio cable. Now you can enjoy your favorite music from the medium players of your smartphone .
2. During music is playing / paused, press the MFB button once to pause/play.
3. The LED keeps blue when music playing.
4. In standby mode, the LED flashes in blue once every 1 second.

Transmitter (TX mode), Switch on / off

Please turn the TX/RX switch to TX position before getting ClipXR started. And TX or RX mode cannot be changed after ClipXR get started.

-4-

Charge Your Adapter

Highly recommend to charge your adapter 100% before usage. It takes approximately 3 hours to charge the adapter from 0% ~ 100% for the first time.

1. Using computer: connect the micro USB cable to the adapter power connector and the standard USB port to computers USB port.
2. Using an electrical outlet: connect the micro USB cable to the adapter and the standard USB port to a DC 5V adapter.
3. Indicator status:
 - a. RED = charging
 - b. OFF = charge completed

Note:

1. When the battery of the adapter is nearly exhausted, LED flashes in red and a beep sound prompts. Please charge the adapter.
2. If you have not used the item for a few months, the LED might not turn red when first charging. It might take 15-35 minutes before the LED turns red. We suggest fully charging the item once at least in two months.

Receiver (RX mode), Switch on / off

Please turn the TX/RX switch to RX position before getting ClipXR started. And TX or RX mode cannot be changed after ClipXR get started.

-2-

Switch on: Press and hold the MFB button for about 2 seconds until the LED flashes blue.

Switch off: Press and hold the MFB button for about 2 seconds until the LED flashes red and goes off.

Transmitter, pairing with a Blue tooth device

The transmitter ClipXR must work together with a Blue tooth headphone / speaker / receiver. After connecting the transmitter to a Blue tooth stereo device, you can enjoy music without wire restriction. Before pairing, please make sure that your Blue tooth device supports Blue tooth A2DP profile.

Pairing procedure

1. Ensure the transmitter ClipXR is turned off.
2. Keep the transmitter ClipXR and your Blue tooth headphone within 1 meter.
3. Press and hold the MFB button for about 4 seconds until the LED flashes blue quickly. The Blue tooth transmitter enters into pairing mode.
4. Set your Blue tooth headphone into pairing mode.
5. The transmitter ClipXR will automatically search, pair and connect with your Blue tooth headphone.
6. After successful pairing, the LED will flash in blue twice every 2 seconds. Now connecting the transmitter ClipXR to your TV, computer or music player via the included 3.5mm audio jack to enjoy stereo music wirelessly.

-5-

Switch on: Press and hold the MFB button for about 2 seconds until the LED flashes blue. Beep sounds will be heard during it.

Switch off: Press and hold the MFB button for about 3 seconds until the LED flashed red then go off. Beep sounds will be heard during it.

Receiver

Pairing with a smartphone

1. Ensure the receiver ClipXR is turned off.
2. Keep the receiver ClipXR and your smartphone within 1 meter.
3. Press and hold the MFB button for about 6 seconds until the LED flashes in red and blue alternatively and fast. The Blue tooth adapter enters into pairing mode.
4. Activated the Blue tooth function and search the device from your smartphone.
5. Select MOCREO ClipXR from the device list, follow the steps and enter pass code 0000 if requested to pair.
6. Connect the receiver ClipXR to your smartphone.
7. After successful pairing, the LED will flash in blue three times every 2 seconds.

-3-

Note:

1. The pairing mode will last for 2 minutes.
2. Once turned on, the transmitter ClipXR will connect automatically with the last-paired device.
3. The transmitter will automatically switch off if no devices can be connected within 10 minutes.
4. LED indicator instruction
 - In standby mode: flash blue once every 1 second
 - In pairing mode: flash blue quickly
 - Connecting mode: flash blue twice every 2 seconds
5. Clear the pairing list: Turn the Blue tooth transmitter ClipXR off, then press and hold the MFB button for about 12 seconds until the LED flashes in red for 1 second and then flashes in blue for 1 second. Afterwards, the transmitter enters into pairing mode automatically.

Safety information

- The battery used in this device may cause a risk of fire or chemical burn if mistreated.
- To avoid any damage or malfunction of the device, do not drop device from high positions.
- Keep it away from humidity, water and any other liquid. If the device is exposed to water, moisture and other liquid, do not operate it to avoid any electrical shock, explosion and damage to the device or yourself.

-6-